

A176 – Cyclone

GPGPU Fanless Small FF RediBuilt™ Supercomputer



Embedded Computing
without Compromise



The A176 Cyclone is the smallest and most powerful Rugged-GPGPU, ideally suited for distributed systems. Originally available with the TX1, the A176 is now available with the even more powerful and more efficient TX2 / TX2i.

Its 256 CUDA cores reach 1 TFLOPS at a remarkable level of energy efficiency, providing all the power you need for local processing right where you need it, next to your sensors.

With its compact size, the A176 Cyclone is the most advanced solution for video and signal processing for the next generation of autonomous vehicles, surveillance and targeting systems, EW systems, and many other applications.

POWERED BY



Rugged **GP GPU** is Aitech

- SWaP Optimized Rugged HPEC
- Ultra Small Form Factor – 129 mm [5.1"] square, < 1 kg [2.2 lbs.]
- NVIDIA® Jetson™ TX2 / TX2i
 - ▶ Pascal™ Architecture GPU w/256 CUDA® cores
 - ▶ NVIDIA Denver 2 Dual-Core ARM® CPU + Cortex® A57 Quad-Core ARM® CPU
 - ▶ 1 TFLOPS
 - ▶ H.264/H.265 HW Encoder
 - ▶ Best Available Performance per Watt – 60 GFLOPS/W
- SATA SSD with Quick Erase
- 8 GB LPDDR4
- Video Capture
 - ▶ SDI (SD/HD) w/dedicated H.264 encoder
 - ▶ Composite (RS-170A [NTSC]/PAL), 8 channels available simultaneously
- I/O
 - ▶ Gigabit Ethernet
 - ▶ DVI/HDMI Output
 - ▶ UART Serial
 - ▶ Composite Input
 - ▶ USB 2.0
 - ▶ SDI Input
 - ▶ Discrettes
 - ▶ CANbus
- CUDA®, OpenGL, OpenGL ES, EGL
- Low Power Consumption
- Environmentally Sealed (IP67)
- Development Platforms Available




www.rugged.com

A176 – Clone



GPGPU Fanless Small FF RediBuilt™ Supercomputer

Embedded Computing
without Compromise

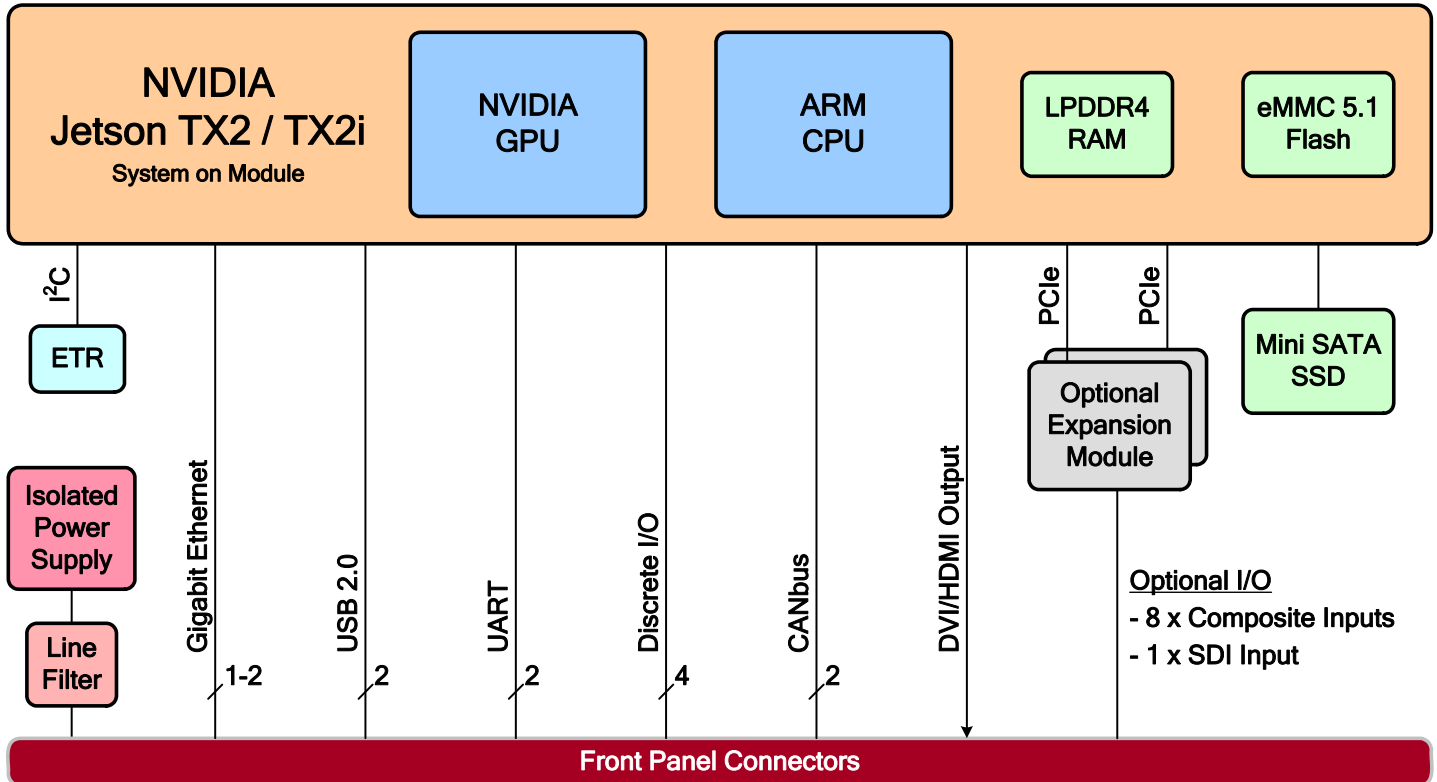

A176 – Clone



Embedded Computing
without Compromise

GPGPU Fanless Small FF RediBuilt™ Supercomputer

System Architecture

System on Module	NVIDIA Jetson TX2 or TX2i
GPU	<ul style="list-style-type: none">• NVIDIA Pascal GPU Architecture• 256 Shaders/CUDA cores• > 1 TFLOPS (fp16)• CUDA• OpenGL• OpenGL ES
CPU	ARMv8 (64-bit) heterogeneous multi-processing (HMP) architecture with two CPU clusters (6 processor cores) <ul style="list-style-type: none">• NVIDIA Denver 2 Dual-Core @ 2.0 GHz (TX2) / 1.95 GHz (TX2i), 128 KB L1 instruction cache + 64 KB L1 data cache per core, 2 MB L2 Unified Cache• ARM® Cortex® A57 Quad-Core @ 2.0 GHz (TX2) / 1.92 GHz (TX2i), 48 KB L1 instruction cache + 32 KB L1 data cache per core, 2 MB L2 Unified Cache
Security	<ul style="list-style-type: none">• HW acceleration for AES 128/192/256 encryption and decryption• HW acceleration for AES CMAC, SHA-1, SHA-256, SHA-384, and SHA-512 algorithms• 2048-bit RSA HW• HW Random Number Generator (RNG) SP800-90
Expansion Options	Main board accommodates up to two optional I/O expansion modules. Available options include: <ul style="list-style-type: none">• Composite Frame Grabber• SDI Frame Grabber Included expansion modules are determined by system I/O Variant, see the I/O section below for details (additional options may be available per customer request, contact an Aitech representative for more info)
System Resources	<ul style="list-style-type: none">• Multi-standard Video/JPEG Decoder/Encoder, HW Encoding for H.264/H.265• Dynamic voltage and frequency scaling• Temperature Sensors• Elapsed Time Recorder• Status Indicator LED

Memory Resources

RAM	8 GB LPDDR4, 128-bit interface, TX2 operating @ 1866 MHz (non-ECC), TX2i operating @ 1600 MHz w/ECC
eMMC	32 GB eMMC 5.1 (boot source)
SATA SSD	Optional Mini SATA SSD with Quick Erase support (standard SSD options are listed in <i>Ordering Information</i> below, additional options [with Secure Erase support, different types of Flash, etc.] may be available per customer request, contact an Aitech representative for more info)

A176 – Clone



GPGPU Fanless Small FF RediBuilt™ Supercomputer

Embedded Computing
without Compromise

I/O		I/O Variant			
		00	01	02	03
Expansion Card Options	Composite Frame Grabber	–	✓	–	✓
	SDI Frame Grabber	–	–	✓	✓
Composite Input RS-170A (NTSC)/PAL, supports simultaneous capture of all channels at full frame rates		–	8	–	8
SDI Input 480/60i, 576/50i, 720/60p, 1080/60i, 1080/30p, dedicated H.264 encoder		–	–	1	1
Gigabit Ethernet (10/100/1000Base-T)		2 (w/TX2) / 1 (w/TX2i)			1
DVI (single-link) / HDMI Output					1
USB 2.0					2
Serial Ports (RS-232 UART)					2
Discrete I/O (Single-Ended)					4
CANbus					2

Software

- Linux OS pre-installed – L4T (Linux for Tegra), a lightly modified Ubuntu-based distribution
- Video capture drivers and sample applications pre-installed, in variants equipped with optional frame grabber(s)
- BIT (Built-In Tests) are available, contact an Aitech representative for more information

Mechanical

Dimensions	127 x 129 x 52 mm [5.0 x 5.1 x 2.05"]
Weight	< 1 kg [2.2 lbs.]

Power

Input Power	<ul style="list-style-type: none"> • Wide input voltage range: 11 – 36 V_{DC} steady state operation • Input reverse polarity protection • EMI/RFI input filter • On-board supplies isolated from external supply • MIL-STD-704 and MIL-STD-1275 compliant (no hold-up)
Power Consumption	<ul style="list-style-type: none"> • ≤5 W idle • 8 – 10W under typical CUDA load • 20W when System on Module is fully utilized <p>Total power consumption depends on system configuration and expansion options</p>

A176 – Clone

GPGPU Fanless Small FF RediBuilt™ Supercomputer



Embedded Computing
without Compromise

Environmental

Operating Temp.	Min.	-40 °C
	Max.	+65 °C w/System on Module in Max-N power mode ⁽¹⁾ +71 °C w/System on Module in Max-Q power mode ⁽¹⁾
Non-Operating Temp.		-55 to +105 °C
Vibration		V2 per VITA 47
Operating Shock		OS2 per VITA 47
Altitude		-1,500 to +60,000 ft. ⁽²⁾
Relative Humidity		0 – 100%
Ingress Protection		IP67 ⁽³⁾
Rain		MIL-STD-810F, Method 506.4, Procedure III
Dust		MIL-STD-810F, Method 510.4, Procedure I & II
Salt Fog		MIL-STD-810F, Method 509.4
Bench Handling		MIL-STD-810F, Method 516.5, Procedure VI
Fungus		Fungus Resistant
EMI/RFI		MIL-STD-461

- Notes:
- (1) System on Module power modes are user configurable via software
 - (2) Depending on temperature and system power dissipation
 - (3) With appropriate connections to system I/O and power connectors


A176 – Clone



Embedded Computing
without Compromise

GPGPU Fanless Small FF RediBuilt™ Supercomputer

Ordering Information

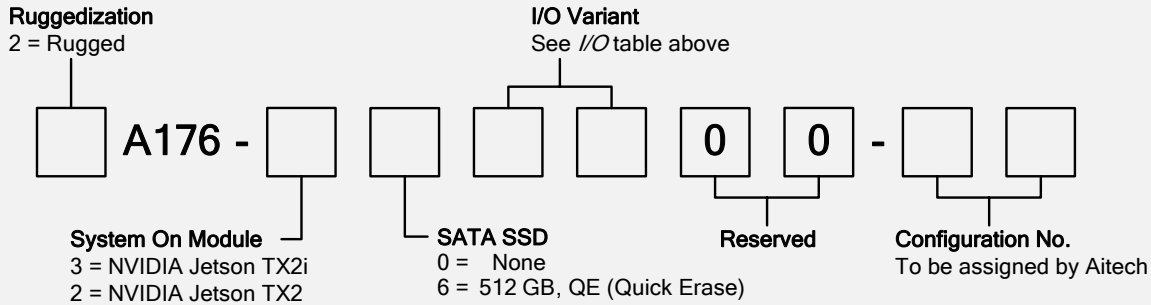

Example: 2A176-260300-00

Rugged **GPGPU** is Aitech

Optional Accessories

MCS176-1-00	Set of Front Panel Mating Connectors
TCA176-SK (Starter Kit)	<ul style="list-style-type: none"> External Power Supply J1 Power Cable J2 I/O Cable



Development Platform

Development platforms are available as an option, which include:

- EV176 – A176 Evaluation System
- I/O Cables and Power Supply
- Software installed/configured by Aitech – latest available OS release, development tools, CUDA examples

Contact your Aitech representative for additional information



Contact Aitech

Contact your Aitech sales representative for additional product information, and for inquiries regarding customized configurations of the A176 and additional software support.

Aitech Defense Systems, Inc.
Chatsworth, CA, USA
Toll Free: (888) Aitech-8 [248-3248]
Direct: +1 (818) 700-2000
Fax: +1 (818) 407-1502
Email: sales@rugged.com

www.rugged.com

Aitech Systems, Ltd.
Herzlia, Israel
Tel: +972 (9) 960-0600
Fax: +972 (9) 954-4315
Email: sales@rugged.com