

# VPX640

NVMe HBA, with Quad M.2 NVMe  
Solid State Drives, 3U VPX



VPX640

## Key Features

- 3U VPX NVMe Host Bus Adapter with quad M.2 NVMe type SSD
- Allows for M.2 Type 2280 and/or 22110
- PCIe Gen3 x8 or dual x4 to the backplane
- PCIe x4 Gen3 to each M.2 Socket
- Health Management through dedicated Processor

## Benefits

- Multi-Terabit storage capacity in a 3U VPX form factor
- Electrical, mechanical, software, and system-level expertise in house
- Full system supply from industry leader
- AS9100 and ISO9001 certified company

OpenVPX™



**vadatech**  
THE POWER OF VISION



# VPX640

The VPX640 is an M.2 Host Bus Adapter (HBA) which supports up to four M.2 type 2280 and/or 22110 style storage devices. The NVMe storage provides high speed and low latency read/write to the SSD devices.

The unit has PCIe Gen3 x8 or dual x4 routed to the P1 connector. Flexible user configuration allows each M.2 to be routed to Ports 0-3, 4-7 or 0-7 (as PCIe x8) on P1. The user can configure and route Ports 0-3 or 4-7 on P1 to any combination of the M.2 modules or to none (e.g. Ports 0-3 to one M.2 and 4-7 to P1 to three more M.2). When not used, Ports 0-3 or 4-7 on P1 can be disabled to avoid clashing with other fabrics in the system.

The VPX640 is available in both air-cooled and rugged conduction-cooled versions. Please contact sales for details.



Figure 1: VPX640

# Block Diagram

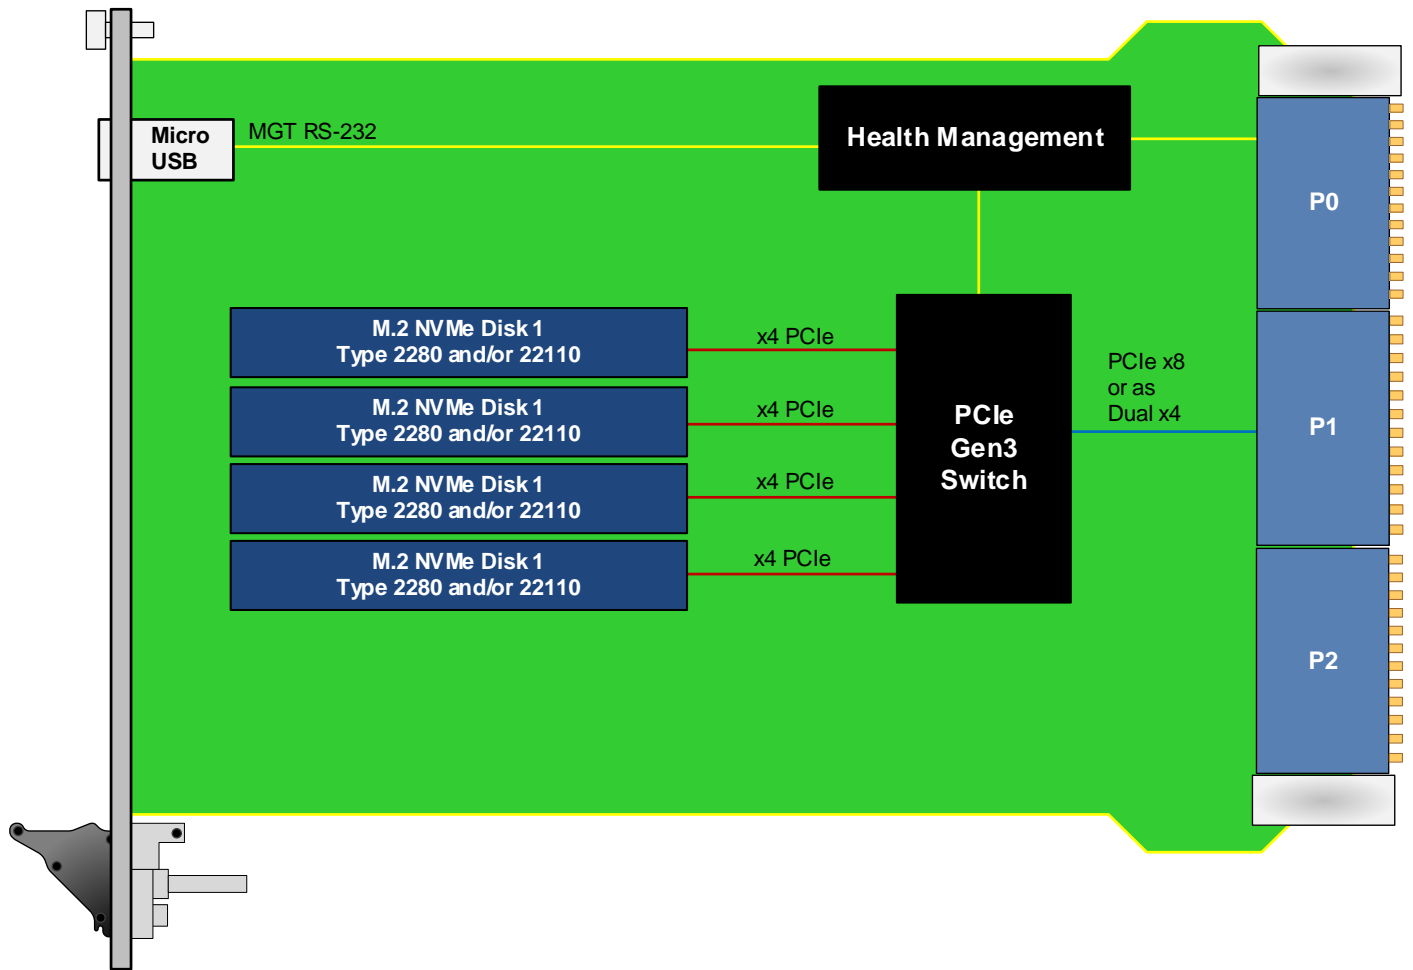


Figure 2: VPX640 Functional Block Diagram

# Front Panel



Figure 3: VPX640 Front Panel

# Backplane Pinout

P1	1	PCIe Gen3 x4	Configurable as dual x4 or single x8
	2		
	3		
	4		
	5	PCIe Gen3 x4	
	6		
	7		
	8		
	9	N/C	
	10		
	11		
	12		
	13	N/C	
	14		
	15		
	16		
Row G	N/C		

Figure 4: VPX640 Backplane Pinout



Figure 5: VPX640 with the clam shell

# Specifications

Architecture		
<b>Physical</b>	<b>Dimensions</b>	3U, 1" Pitch
<b>Type</b>	<b>VPX Storage</b>	M.2 NVMe SSD
Standards		
<b>VPX</b>	<b>Type</b>	VITA 46.x
<b>VPX</b>	<b>Type</b>	VITA 65 OpenVPX
<b>Module Management</b>	<b>IPMI</b>	IPMI v2.0
<b>PCIe</b>	<b>Lanes</b>	Dual x4 or single x8 as PCIe
<b>Storage</b>	<b>SSD</b>	Up to four M.2 NVMe SSD
Configuration		
<b>Power</b>	<b>VPX640</b>	4W without SSD (with four 2 TB SSD: 25W)
<b>Front Panel</b>	<b>Micro USB</b>	RS-232 from Health Management
<b>VPX Interfaces</b>	<b>Slot Profiles</b>	See <a href="#">Ordering Options</a>
	<b>Rear IO</b>	PCIe Gen3 x8 or (optional x4)
<b>Software Support</b>	<b>Operating System</b>	Linux, Windows, Solaris and VxWorks
Other		
<b>MTBF</b>		MIL Hand book 217-F@ TBD hrs
<b>Certifications</b>		Designed to meet FCC, CE and UL certifications, where applicable
<b>Standards</b>		VadaTech is certified to both the ISO9001:2015 and AS9100D standards
<b>Warranty</b>		Two (2) years, see <a href="#">VadaTech Terms and Conditions</a>

## INTEGRATION SERVICES AND APPLICATION-READY PLATFORMS

VadaTech has a full ecosystem of OpenVPX, ATCA and MTCA products including chassis platforms, shelf managers, AMC modules, Switch and Payload Boards, Rear Transition Modules (RTMs), Power Modules, and more. The company also offers integration services as well as pre-configured Application-Ready Platforms. Please contact VadaTech Sales for more information.

# Ordering Options

## VPX640 – ABC-DEF-0HJ

<b>A = M.2 NVMe SSD 1</b> 0 = No SSD 1 1 = 512 GB 2 = 1 TB 3 = 2 TB 4 = 4TB	<b>D = M.2 NVMe SSD 3</b> 0 = No SSD 3 1 = 512 GB 2 = 1 TB 3 = 2 TB 4 = 4TB	<b>G = Applicable Slot Profiles</b> 0 = 5 HP, IEEE 1101 1 = 5HP, VITA 48.1
<b>B = M.2 NVMe SSD 2</b> 0 = No SSD 2 1 = 512 GB 2 = 1 TB 3 = 2 TB 4 = 4TB	<b>E = M.2 NVMe SSD 4</b> 0 = No SSD 4 1 = 512 GB 2 = 1 TB 3 = 2 TB 4 = 4TB	<b>H = Environmental</b> See <a href="#">Environmental Specification</a>
<b>C = VPX Connector Type</b> 0 = Standard 50u Gold Rugged 1 = KVPX Connectors	<b>F = PCIe Interface</b> 0 = x4 1 = Dual x4 2 = Single x8	<b>J = Conformal Coating</b> 0 = No coating 1 = Humiseal 1A33 Polyurethane 2 = Humiseal 1B31 Acrylic

## Environmental Specification

Option H	Air Cooled			Conduction Cooled	
	H = 0	H = 1	H = 2	H = 3	H = 4
<b>Operating Temperature</b>	AC1* (0°C to +55°C)	AC3* (-40°C to +70°C)	CC1* (0°C to +55°C)	CC3* (-40°C to +70°C)	CC4* (-40°C to +85°C)
<b>Storage Temperature</b>	C1* (-40°C to +85°C)	C3* (-50°C to +100°C)	C1* (-40°C to +85°C)	C3* (-50°C to +100°C)	C3* (-50°C to +100°C)
<b>Operating Vibration</b>	V2* (0.04 g2/Hz max)	V2* (0.04 g2/Hz max)	V3* (0.1 g2/Hz max)	V3* (0.1 g2/Hz max)	V3 (0.1 g2/Hz max)
<b>Storage Vibration</b>	OS1* (20g)	OS1* (20g)	OS2* (40g)	OS2* (40g)	OS2* (40g)
<b>Humidity</b>	95% non-condensing	95% non-condensing	95% non-condensing	95% non-condensing	95% non-condensing

Notes: \*Nomenclature per ANSI/VITA 47. Contact local sales office for conduction cooled (H = 2, 3, 4)

## Related Products

VPX004



- Unified 1 GHz quad-core CPU for, Shelf Manager, and Fabric management
- 1GbE base switch with dual 100/1000/10G uplink
- Full Layer 3 managed Ethernet switch

VPX754



- 3U VPX module Intel 5th Generation Xeon D-1577, D-1548 or D-1520 (Broadwell) SoC
- PCIe Gen3 dual x4 or single x8
- Front-panel video out via micro HDMI

VTX870



- OpenVPX benchtop development platform
- Up to five 3U VPX payload slots
- Compatible with 0.8-inch, 0.85-inch and 1.0-inch modules

# Contact

## VadaTech Corporate Office

198 N. Gibson Road, Henderson, NV 89014

Phone: +1 702 896-3337 | Fax: +1 702 896-0332

## Asia Pacific Sales Office

7 Floor, No. 2, Wenhua Street, Neihu District, Taipei 114, Taiwan

Phone: +886-2-2627-7655 | Fax: +886-2-2627-7792

## VadaTech European Sales Office

VadaTech House, Bulls Copse Road, Southampton, SO40 9LR

Phone: +44 2380 016403

[info@vadatech.com](mailto:info@vadatech.com) | [www.vadatech.com](http://www.vadatech.com)

# Choose VadaTech

## We are technology leaders

- First-to-market silicon
- Constant innovation
- Open systems expertise

## We commit to our customers

- Partnerships power innovation
- Collaborative approach
- Mutual success

## We deliver complexity

- Complete signal chain
- System management
- Configurable solutions

## We manufacture in-house

- Agile production
- Accelerated deployment
- AS9100 accredited



**vadatech**  
THE POWER OF VISION

## Trademarks and Disclaimer

The VadaTech logo is a registered trademark of VadaTech, Inc. Other registered trademarks are the property of their respective owners. AdvancedTCA™ and the AdvancedMC™ logo are trademarks of the PCI Industrial Computers Manufacturers Group. All rights reserved. Specification subject to change without notice.

© 2019 VadaTech Incorporated. All rights reserved.  
DOC NO. 4FM737-12 REV 01 | VERSION 1.5 – APR/242